

GETTING STARTED

Anchor products are carefully inspected at the factory and packed in specially designed boxes for safe transport.

However, if any damage occurred during shipment please contact the freight carrier immediately and notify your dealer of the pending freight claim. Repack unit in the original box and await inspection by the carrier's claim agent.

NOTE: All damage claims must be made with freight carrier!

SYSTEM RETURNS

Contact the dealer of purchase, or Anchor Audio Customer Service at 888/444-6077, to obtain an RA (Return Authorization) number for service or repair. All shipments to Anchor Audio require an RA number and prepaid shipping. All C.O.D. shipments will be refused and returned at your expense.

IMPORTANT: Save the shipping box & packing materials, they were specially designed to ship your unit!

WARRANTY REGISTRATION

Go to WWW.ANCHORAUDIO.COM and select "WARRANTY". Completing the online form will activate the sound systems six-year limited warranty (two-year limited warranty for CD players and microphones).

ANCHOR AUDIO CUSTOMER SERVICE

888/444-6077 310/784-2300

www.anchoraudio.com

AN-30 TECHNICAL SPECIFICATIONS

Rated Power Output	30 Watts
Max SPL @ Rated Power	109 dB @ 1 meter
Frequency Response	100Hz - 15KHz ±3dB
Speaker Type	4.5" Neodymium woofer
Line Out Jack	line level, 3.5 mm – stereo
Line In Jack	line level, 3.5 mm – stereo & 1/4" phone – mono
DC Input Jack	12-24 V, 2A Min.
Dimensions (HWD)	5.5 x 5.5 x 6.5" / 14 x 14 x 16.5 cm
Weight	1.5 pounds / 0.68 Kg




(Specifications subject to change without notice)



Anchor Audio, Inc.

Portable Sound Systems • Torrance, California

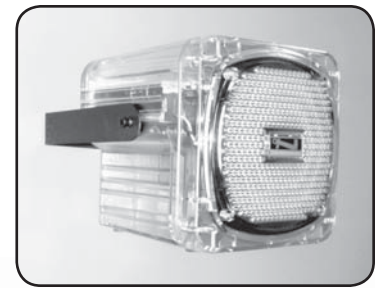

AN-30

MONITOR SPEAKER

OWNER'S MANUAL



A MESSAGE FROM THE OWNER

Thank you for choosing an Anchor Audio portable sound system. Our products incorporate state-of-the-art design and the finest quality of materials and workmanship. We're proud of our products and appreciate the confidence which you have shown by selecting an Anchor system.

I hope you'll take a few minutes to review this manual. We've incorporated several unique features into our products, and your knowledge of how to use them will enhance the performance and your enjoyment of the system.

Janet Jacobs – President
on behalf of all Anchor Employees

AN-30 DESCRIPTION & APPLICATIONS

The AN-30 speaker may be the smallest system in the Anchor Audio product line but it's big in power with 109 dB of sound from 30 watts of rated power output. The AN-30 can cover a typical sized conference room or classroom with ease. The AN-30 is so lightweight, at under two pounds, that it mounts effortlessly to a wall or ceiling bracket. It has a shielded magnet speaker that won't cause interference when installed near video monitors.

Applications for this product include foreground and background music systems, music playback, full-range paging and instructional applications. Combine an AN-30 and projector in a classroom for the perfect audio visual solution.

The AN-30 case is available in your choice of black, blue, red, yellow or transparent to blend into any environment. A variety of mounting accessories are available for wall, ceiling and speaker stand installations.



**NEED MORE HELP? Call Anchor Audio Customer Service 888-444-6077
or Visit Our Website www.anchoraudio.com**

ARCHITECTS' SPECIFICATION

The monitor speaker shall be an Anchor AN-30 or equivalent. The general construction shall include an injection-molded case, one 4.5" Neodymium woofer and input terminations consisting of both 3.5 mm and 1/4" phone.

The maximum speaker dimensions shall not exceed 5.5" high, 5.5" wide and 6.5" deep. The maximum weight shall be 1.5 pounds.

The case shall be formed by injection-molded high-impact polycarbonate, and shall have a smooth finish of black, blue, red, yellow or transparent color.


The woofer shall be magnetically shielded so as not to cause video interference, and shall be protected by a polycarbonate grill molded into the case.

The monitor speaker has the ability to be mounted on walls, ceilings, equipment racks and speaker stands with appropriate hardware and accessories.


ATTACHING AN-30 TO SB-30 SPEAKER BRACKET

AN-30 speaker (including allen wrench & two allen head screws) and SB-30 speaker bracket for wall or ceiling mounting.


NOTE: When connecting multiple AN-30 units (daisy chaining) stereo cable MUST be used to avoid interference.

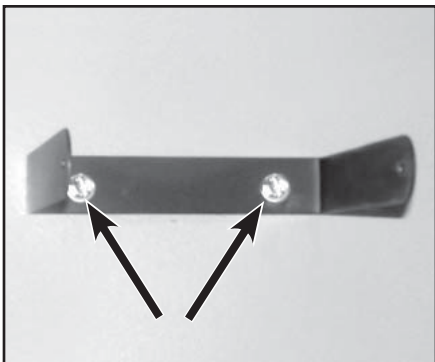


1. Attach mounting bracket securely to wall/ceiling with pre-drilled holes.

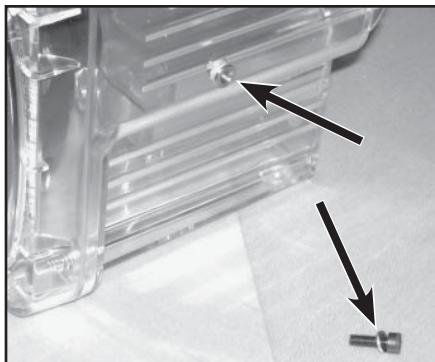

2. Remove allen head screws from bracket mounts on AN-30.

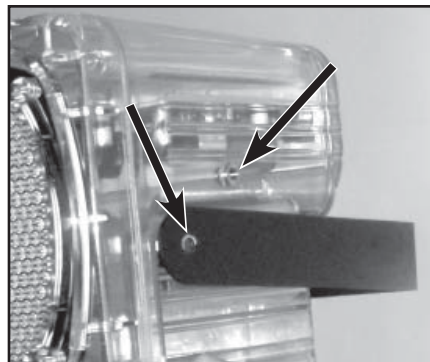

3. Align hole on bracket arm with mounting hole AN-30 case.

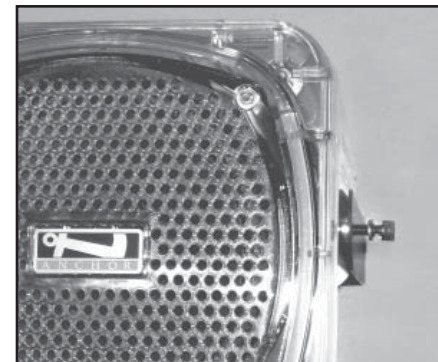

4. Secure speaker to mounting bracket on both sides.

Waste electrical and electronic products must not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or Retailer for recycling advice.



MOUNTING ACCESSORIES

SB-30: Speaker Stand Bracket

A multi-purpose bracket used for mounting the AN-30 to a wall or ceiling.

SS-300: Speaker Stand

Durable light-weight stand for AN-30 speaker (stand receptacle molded into case bottom)