



The industry's smallest, lightest,  
8,000 lm\* projectors\*\* with robust features.

### WUXGA

FHZ85 : 8,000lm (Center) 7,300lm

FHZ80 : 6,500lm (Center) 6,000lm



[pro.sony/projectors](http://pro.sony/projectors)



\* VPL-FHZ85 \*\* As of August 2021 (according to Sony research), in 3LCD laser projectors of 8,000 lm center brightness

# Bright, rich color even in high ambient lighting

## Improved Reality Creation and new, Reality Text

Reality Creation is Sony's unique real-time signal processing technology that improves image clarity to close-to-true 4K quality. In addition, Reality Text improves display of text-based presentation materials which are commonly used for conference rooms and classrooms.

### For images



Reality Creation OFF

Reality Creation ON

Clearer image with more depth  
Simulated images

### For presentation materials

Apr	Oct	Nov	Dec	Fluctuation	ALL
8,082	222,632	262,264	263,126		4425,533
8,049	21,888	23,899	18,407		529,831
8,058	52,589	14,818	7,805		530,870
1,825	46,761	50,125	49,577		677,690
7,884	49,717	26,575	24,551		433,538
8,199	21,308	46,782	49,329		511,127
8,030	17,149	49,896	8,879		467,264
8,129	5,826	49,896	46,924		748,210
8,889	21,808	21,909	21,909		636,561

Reality Text OFF

Reality Text ON

Clearer letters and lines with enhance legibility  
Simulated images

## Bright View

Bright View is Sony's unique signal processing technology that brightens images without sacrificing color in high ambient light environments typically found in business and higher education environments.



Bright View OFF



Bright View ON

Simulated images

## Intelligent Settings with Ambiance

Intelligent Settings offer four location selections, optimizing brightness, cooling system and other projector settings to suit usage environments. In addition, with Ambiance, our new built-in ambient light sensor, the projector measures a room's brightness and automatically adjusts color gain, Bright View mode, and Reality Creation settings to match the environment and enhance the viewing experience.

### Ambiance includes an ambient light sensor



### Location selection in Intelligent Setting

Meeting/Classroom



Clarity first

Museum



Color Accuracy first

Entertainment



Vivid color first

Multi-screen



Easy-to-match in color first

## High Picture Quality

The projectors support up to 4K 60P input signals, a standard format for 4K videos. Sony's super-resolution Reality Creation 4K upscaler analyzes every pixel in any direction, then employs a digital signal processing algorithm to map pixels against an ever-evolving picture patterning database to enhance color, contrast, and textures, for beautiful near-4K image quality from a WUXGA Projector.



Market-available Projector



VPL-FHZ85/FHZ80

Simulated images

# Sophistical spatial design and installation flexibility


## Smallest\*, lightest\* in its class with attractive blend-in design

Slim, stylish case design features a flat top surface that blends in discreetly when the projector is ceiling mounted.

\*As of August 2021 (according to Sony research), in 3LCD laser projectors


## Wide Lens Shift

Very wide lens shift capability of vertical + 70%

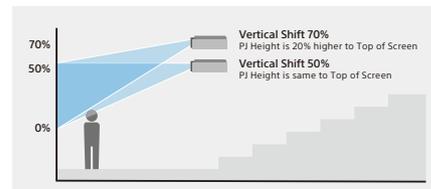

The projector has variety of lens options and wide lens shift capability for flexible installation, virtually anywhere.

## Optional Lenses - throw ratio and vertical lens shift chart

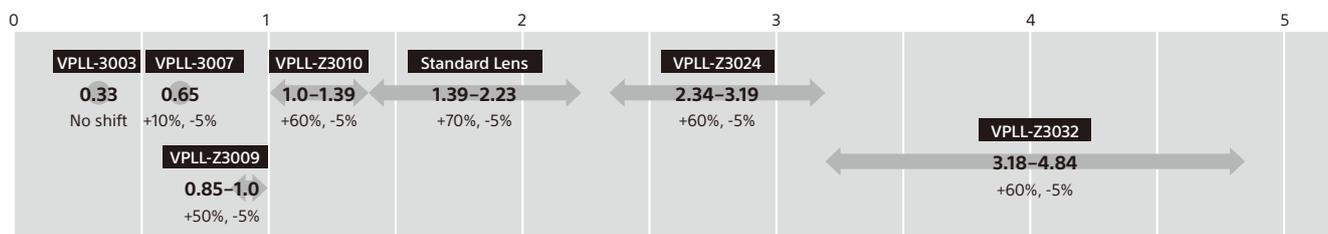


# Extended brightness

## Intelligent Settings


The Intelligent Settings function simplifies installation and maximizes performance based on usage, image detail, color richness, color fidelity, light output, cooling level and output noise.

In addition, the Meeting/Classroom setting controls the laser output to maximize brightness levels based on actual usage times and operation frequency.

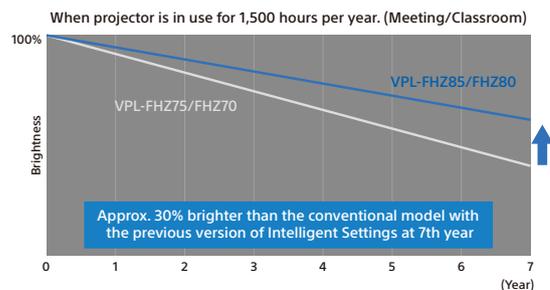


## Hassle-free Automatic Filter Cleaning

The projector has an automated filter cleaning system that removes dust every 100 hours to prevent dust from being accumulated. The feature enables sufficient intake of clean air to allow for proper cooling.



## Countermeasures to dust

The laser light source is sealed to prevent it from attracting dust that can interfere with brightness. The 3LCD panels are also enclosed in a dedicated cooling duct structure with an air filter to prevent dust from entering.

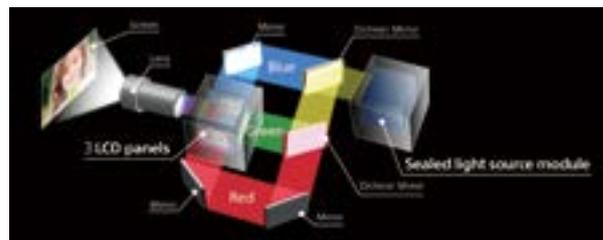

# Other Features

## Data Cloning

Any settings made for one projector can be copied to the second and subsequent projectors using a USB memory drive. This greatly simplifies installation and set up of multiple projectors.


## Auto Input Select

The Auto Input Select feature automatically selects a wide input signal, so there's no need to change the input each time a device is connected to the projector.

## Auto Power on

When connected to a computer, the projector's power turns on automatically, without having to operate the power button.

# Connector Panels

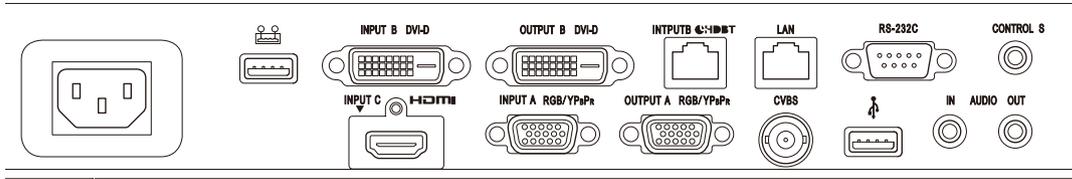

## Specifications

		VPL-FHZ85	VPL-FHZ80
Display system		3 LCD system	
Display device	Size of effective display area	0.76" (19 mm) x 3 BrightEra LCD Panel, Aspect ratio: 16:10	
	Number of pixels	6,912,000 (1920 x 1200 x 3) pixels	
Projection lens*1	Zoom	Powered (Approx. x 1.6)	
	Focus	Powered	
	Lens shift	Powered, Vertical: -5%, +70%, Horizontal: +/- 32%	
	Throw ratio	1.39:1 to 2.23:1	
Light source	Laser diode		
Screen size	40" to 600" (1.02 m to 15.24 m) ( measured diagonally)		
Light output (Mode: Standard / Middle)		7,300 lm*2, 8,000 lm (Center)*3 / 5,840 lm	6,000 lm*2, 6,500 lm (Center)*3 / 4,800 lm
Color light output (Mode: Standard / Middle)		7,300 lm / 5,840 lm	6,000 lm / 4,800 lm
Time until light output declines to 50 %*4		20,000 hours (Standard) / 30,000 hours (Middle)	
Contrast ratio*5 (full white / full black)		∞:1	
Displayable scanning frequency	Horizontal	15kHz to 93kHz	
	Vertical	23Hz to 63Hz	
Display resolution	Computer signal input	Maximum display resolution: 1920 x 1200 dots*6	
	Video signal input	NTSC, PAL, SECAM, 480/60i, 576/50i, 480/60p, 576/50p, 720/60p, 720/50p, 1080/60i, 1080/50i, 1080/60p, 1080/50p, 3840/60p, 3840/30p, 3840/25p, 3840/24p, 4096/60p, 4096/30p, 4096/25p, 4096/24p	
Keystone correction (Max.)	Vertical	+/- 30 degrees	
	Horizontal	+/- 30 degrees	
Input / Output (Computer / Video / Audio / Control)	INPUT A	RGB / Y P <sub>B</sub> P <sub>R</sub> input connector: Mini D-sub 15-pin (female), Audio input connector: Stereo mini jack	
	INPUT B	DVI input connector: DVI-D 24-pin (single link), HDCP support, Audio input connector: Shared with INPUT A	
	INPUT C	HDMI input connector: HDMI 19-pin, HDCP support, Audio input connector: HDMI audio support	
	INPUT D	HDBaseT interface connector: RJ45, 4 play (Video, Audio, LAN, Control)	
	VIDEO IN	Video input connector: BNC, Audio input connector: Shared with input A	
	OUTPUT A	Monitor output for Input A Connector: Mini D-sub 15-pin (female), Audio output connector: Stereo mini jack	
	OUTPUT B	Monitor output for Input B Connector: DVI-D 24-pin (single link), HDCP not supported, Audio output, Monitor out connector: Stereo mini jack	
	REMOTE	D-sub 9-pin (male) / RS232C	
	LAN	RJ45, 10BASE-T / 100BASE-TX	
	IR (Control S)	Stereo mini jack, Plug in power DC 5 V	
	USB	TYPE-A (for F/W update), TYPE-A (for Power supply)	
Acoustic noise (Mode: Standard / Middle)		38 dB / 36 dB	36 dB / 34 dB
Operating temperature (Operating humidity)		0°C to 45°C (32°F to 109°F) / 20% to 80% (no condensation)	
Storage temperature (Storage humidity)		-10°C to +60°C (14°F to +140°F) / 20% to 80% (no condensation)	
Power requirements		AC 100 V to 240 V, 5.1 A to 2.2 A, 50 Hz / 60 Hz	
Power consumption (Mode: Standard / Middle)	AC 100 V to 120 V	506 W / 384 W	397 W / 288 W
	AC 220 V to 240 V	474 W / 363 W	378 W / 278 W
Power consumption (Standby mode)	AC 100 V to 120 V	0.5 W (when "Standby mode" is set to "Low")	
	AC 220 V to 240 V	0.5 W (when "Standby mode" is set to "Low")	
Power consumption (Networked Standby mode)	AC 100 V to 120 V	9.8 W (LAN) / 10.6 W (HDBaseT) / 10.6 W (ALL Terminals and Networks Connected, when "Standby Mode" is set to "Standard")	
	AC 220 V to 240 V	10.9 W (LAN) / 11.6 W (HDBaseT) / 11.6 W (ALL Terminals and Networks Connected, when "Standby Mode" is set to "Standard")	
Outside dimensions		Approx. W 460 x H 169 x D 494 mm (W 18 1/8 x H 6 3/4 x D 19 1/2 in) (without protrusions)	
Mass		Approx. 13 kg (29 lb)	Approx. 13 kg (28 lb)
Optional accessories	Projection lenses	VPLL-3003 / 3007 / Z3009 / Z3010 / Z3024 / Z3032	

\*1 With supplied standard lens \*2 The value is in accordance with ISO 21118, and may differ depending on the actual unit. Brightness and contrast vary depending on use conditions and environments. \*3 The value is light output measured at center area of screen in Standard mode, and average of all products shipped. \*4 Estimated time until light output declines to 50 % varies depending on environment. \*5 The figures are approximate. They vary depending on the environment or how the projector is used. \*6 Available for VESA Reduced Blanking signal.

IEC 60825-1:2014 CLASS 1 LASER PRODUCT



As with any bright light source, do not stare into the beam, RG2 IEC 62471-5:2015.

©2021 Sony Corporation.

Reproduction in whole or in part without written permission is prohibited. Features and specifications are subject to change without notice.

The values for mass and dimension are approximate. "SONY" is a registered trademark of Sony Corporation.

"Z-Phosphor" is trademarks of Sony Corporation. "BrightEra" is a registered trademark or a trademark of Sony Group Corporation or its affiliates.

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC

in the United States and other countries. HDBaseT™ and the HDBaseT Alliance logo are the trademarks of the HDBaseT Alliance.

All other trademarks are the property of their respective owners.

Please visit Sony's professional website or contact your Sony representative for specific models available in your region.

MK21002V1YIT21SEP