



PROJECTOR LS920WU


Key Features

- 6,000 ANSI Lumens to deliver bright images up to 300" in size
- 2nd generation Laser Phosphor technology with a 20,000-hour lifespan
- Wide H/V lens shift and 1.6x optical zoom for flexible installation
- Creativity supported by 360° projection & portrait mode
- Dual HDMI 2.0b supporting 4K HDR/HLG content



Product Description

The LS920WU is an advanced 6,000 ANSI Lumens WUXGA installation projector. Adopting 2nd generation Laser Phosphor technology, the LS920WU offers high and consistent brightness with a lifespan of 20,000 hours and a screen size of up to 300". Wide lens shift, 1.6x optical zoom, 360° projection, and portrait mode combine for incredible flexibility that gives life to captivating creative installations, especially ideal for auditoriums, board rooms, commercial displays, restaurants, and sports bars. Dual HDMI 2.0b / HDCP 2.2 ports ensure access to original 4K quality content with HDR/HLG support. Add to that the compact size and the built-in HDBaseT for the perfect mix of high-quality projection and cost-effectiveness.

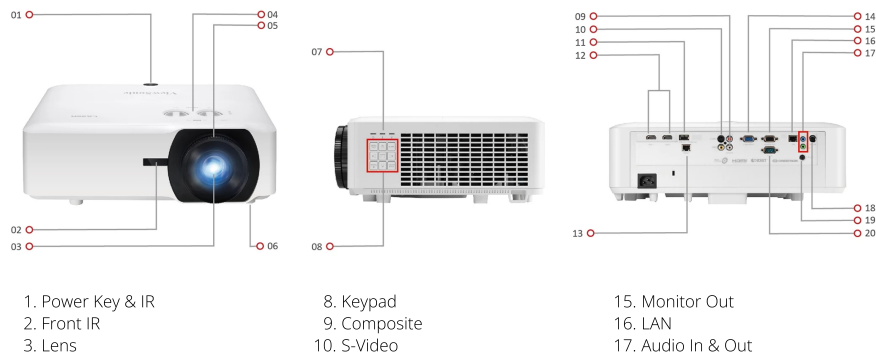

- | | | |
|----------------------------|-------------------------|-------------|
| 4. Lens Shift Control Knob | 11. USB Type A(5V/1.5A) | 18. 3D VESA |
| 5. Zoom/Focus Ring | 12. HDMI X 2 | 19. 12V OUT |
| 6. Adjustment Foot | 13. HDBaseT | 20. RS-232 |
| 7. LED Indicator | 14. Computer In | |
-

Visit Us  www.viewsonic.com

VENDOR

Vendor:	Qisda
---------	-------

SPECIFICATION

Native Resolution:	1920x1200
DMD Type:	DC3
Brightness:	6000 (ANSI Lumens)
Contrast Ratio:	3000000:1
Display Color:	1.07 Billion Colors
Light Source Type:	Laser Phosphor system
Light Source Life (hours) with Normal Mode:	20000
Light Source Life (hours) with SuperEco Mode:	30000 (Eco)
Lamp Watt:	Nichia 74W x2
Lens:	F=1.81-2.1, f=14.3-22.9mm
Projection Offset:	0%
Throw Ratio:	1.36-2.18
Optical Zoom:	1.6X
Digital Zoom:	0.8x-2.0x
Image Size:	30"-300"
Throw Distance:	0.88-14.09m (100"@2.93m)
Keystone:	H: +/-40°, V: +/-40°
Lens Shift V. Range:	+50%, -50%
Lens Shift H. Range:	+23%, -23%
Audible Noise (Normal):	36dB
Audible Noise (Eco):	29dB
Input Lag:	16ms
Resolution Support:	VGA(640 x 480) to 4K(3840 x 2160)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160p
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K-135KHz
Vertical Scan Rate:	23-120Hz

INPUT

Computer in (share with component):	1
Composite:	1
S-Video:	1
HDMI:	2 (HDMI 2.0, HDCP 1.4/2.2)
Audio-in (3.5mm):	1
Audio-in (RCA R/L):	1
3D VESA (Sync):	1
HDBaseT:	1

OUTPUT

Monitor out:	1
Audio-out (3.5mm):	1
Speaker:	10W x2
USB Type A (Power):	1 (5V/ 1.5A)
12V Trigger (3.5mm):	1

CONTROL

RS232 (DB 9-pin male):	1
RJ45 (LAN control):	1
USB Type A (Services):	1 (share with USB A Output)

OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Power Consumption:	Normal: 450W Standby: <0.5W
Operating Temperature:	0~40°C
Carton:	Brown
Net Weight:	6.5
Gross Weight:	9
Dimensions (WxDxH) with Adjustment Foot:	405x305x145mm
Packing Dimensions:	515x490x276mm
OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S- Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, total 23 languages
User Guide Language:	English, S-Chinese, T- Chinese, Indonesian, Finnish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Arabic, Czech, Thai, Vietnamese, total 20 languages

STANDARD ACCESSORY

Power Cord:	1
VGA Cable:	1
Remote Control:	1 (w/ laser pointer)
QSG:	Yes
Warranty Card:	Yes (CN Only)

OPTIONAL ACCESSORY

Wall/Ceiling Mount:	PJ-WMK-007
---------------------	------------