



Key Features

SuperColor: Amazing Color Accuracy | 3,600 Lumen Brightness |
Network Capable | USB Reader and USB Display | WiFi and LAN Display



Product Description


The ViewSonic® PG603W WXGA networkable projector features 3,600 lumens, WXGA 1280x800 native resolution, an intuitive, user-friendly design, and a sleek white chassis. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment, while SonicMode™ sound enhancement technology powers a 10W speaker for incredibly clear and audible sound. An energy-saving SuperEco® feature reduces power consumption and extends the lamp life by up to 15,000 hours. An integrated USB A reader port, and optional WiFi (PJ-WPD-200 wireless dongle sold separately) deliver flexible content streaming and wireless presentation options. Equipped with Crestron® LAN controller, this projector makes it easy for IT admin to remotely control and manage multiple projectors from their workstations. With horizontal and vertical keystone correction, 4 corner adjustments, and extensive connectivity, this projector provides for flexible and quick set-ups, and is the ideal projector for use in education and business environments.

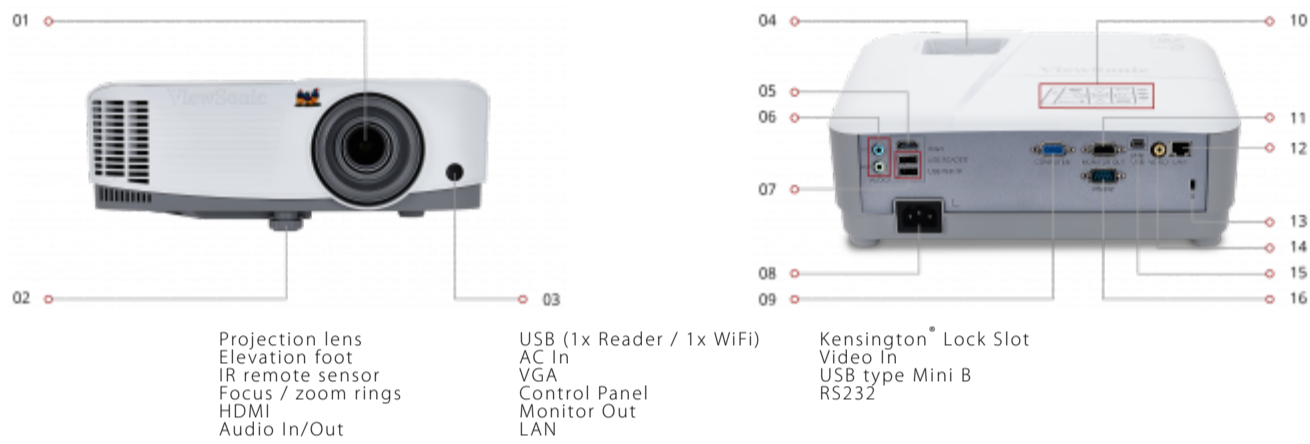

1280 x 800
RESOLUTION



3,600 ANSI
LUMENS



1.55-1.70
THROW RATIO

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Type:	DLP Lamp
Resolution Type:	WXGA (1280x800)
Resolution:	1280 x 800
Brightness (Lumens):	3,600 ANSI
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Throw Distance:	3.3 - 36 ft / 1 - 11 m
Throw Ratio:	1.55-1.70
Keystone:	Vertical (± 30°) / Horizontal (± 20°)
Lens:	1.1x optical zoom
Light Source (watt):	200
Light Source Life, Normal (hours):	5000
Light Source Life, Dynamic Eco-Mode (hours):	15000
Color Depth:	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio:	22,000:1
Aspect Ratio:	16:10

Video Signal:

Frequency Horizontal:	15K~102kHz
Frequency Vertical:	23~120Hz

Compatibility:

PC Resolution (max):	1920 x 1080
PC Resolution (min):	640 x 480
Mac® Resolution (max):	1920 x 1080
Mac® Resolution (min):	640 x 480

Connector:

USB 2.0 Type A(2), USB Reader(1), Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS-232)(1), HDMI(1), VGA In(1), VGA Out(1), Composite RCA Video In(1), Mini USB(1), Wifi(PJ-WPD-200 (Optional))

Audio:

Internal Speakers:	10W (x1)
--------------------	----------

Power:

Voltage:	100-240V+/- 10%, 50/60Hz AC
Consumption (typical):	270W
Stand-by:	<0.5W

Controls:

Physical Controls:	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	0-90%

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Weight (imperial):

Net (lbs):	5.1
Gross (lbs):	7.3

Weight (metric):

Net (kg):	2.3
Gross (kg):	3.3

Dimensions (imperial) (WxHxD):

Packaging (in.):	14.4 x 11.8 x 7.4
Physical (in.):	11.6 x 8.6 x 4.3

Dimensions (metric) (WxHxD):

Packaging (mm):	365.0 x 300.0 x 188.0
Physical (mm):	294.0 x 218.0 x 110.0

General:

AV Control: AMX Certified, ATEN Certified, Crestron Certified, Extron Certified, PJ Link Certified

Regulations: FCC, cTUVus, NOM

PACKAGE CONTENTS: PG603W projector, power cable, VGA cable, remote control, Quick Start Guide

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907916010

Accessories:

PGD-350, PJ-CASE-008, PJ-SCW-1001W, PJ-WMK-006, PJ-WPD-200, PM-FCP, PRJ-EE-07-03, PRJ-EEEW-07-01, PRJ-EEEW-07-02, PRJ-EW-07-01, PRJ-EW-07-02, RLC-109