



Key Features

Bright Images in any Environment | Long Lamp Life | SuperColor:
Amazing Color Accuracy



Product Description


The ViewSonic® PG701WU WUXGA projector features 3,500 lumens, 1920x1200 native resolution, an intuitive, user-friendly design, and a sleek white chassis. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment. With vertical keystone correction, and extensive connectivity options, the PG701WU provides flexible and quick set-up. What's more, an energy-saving SuperEco™ feature reduces power consumption and extends the lamp life by up to 20,000 hours. The PG701WU is the ideal projector for both high-definition presentations and vibrant multimedia entertainment.

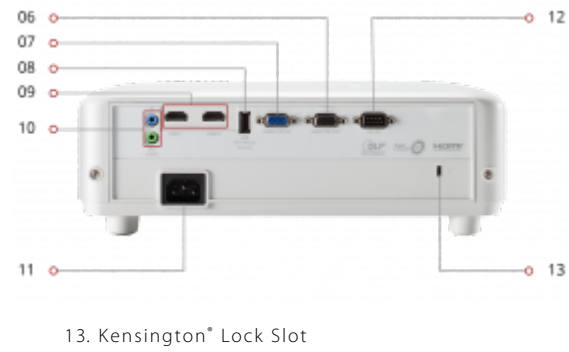

1920 x 1200
RESOLUTION



3,500 ANSI
LUMENS



1.5-1.65
THROW RATIO

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Type:	DLP Lamp
Resolution Type:	WUXGA (1920x1200)
Resolution:	1920 x 1200
Brightness (Lumens):	3,500 ANSI
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Throw Distance:	3.3 – 36.0 ft / 1.0 m – 11.0 m
Throw Ratio:	1.5-1.65
Keystone:	Vertical (+/- 40°)
Lens:	1.1x optical zoom
Light Source (watt):	203
Light Source Life, Normal (hours):	5000
Light Source Life, Dynamic Eco-Mode (hours):	20000
Color Depth:	1.07B Color (R/G/B 10bit)
Aspect Ratio:	16:10

Video Signal:

Frequency Horizontal:	15K~102KHz
Frequency Vertical:	23~120Hz

Compatibility:

PC Resolution (max):	1920 x 1200
PC Resolution (min):	640 x 480
Mac® Resolution (max):	1920 x 1200
Mac® Resolution (min):	640 x 480

Connector:

USB 2.0 Type A(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI 1.4 In(1), HDMI 1.4 (with HDCP 1.4)(1)

Audio:

Internal Speakers:	2W (x1)
--------------------	---------

Power:

Consumption (typical):	300W
Stand-by:	<0.5W

Controls:

Physical Controls:	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	0-90%

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Weight (imperial):

Net (lbs):	5.7
Gross (lbs):	8.2

Weight (metric):

Net (kg):	2.6
Gross (kg):	3.7

Dimensions (imperial) (WxHxD):

Packaging (in.):	16.3 x 6.6 x 11.7
Physical (in.):	12.3 x 8.7 x 4.3

Dimensions (metric) (WxHxD):

Packaging (mm):	415.0 x 168.0 x 297.0
Physical (mm):	312.0 x 222.0 x 108.0

General:

Regulations: FCC, cTUVus, ROHS

PACKAGE CONTENTS: PG701WU projector, Power Cable, VGA Cable, Remote Control, Quick Start Guide

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907001747

Accessories:

HB10B, IFP2710, PGD-350, PJ-SCW-1001W, PJ-WMK-006, PJ-WMK-007, RLC-119, VC10, VCB10