

## Key Features

Bright Images in any Environment | Up to 20,000 hours lamp life | Easy  
LAN Control | SuperColor: Amazing Color Accuracy




## Product Description

The ViewSonic® PG706HD 1080p projector features 4,000 lumens, Full HD 1920x1080 native resolution, an intuitive, user-friendly design, and a sleek white chassis. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment. Equipped with Crestron® LAN controller, this projector makes it easy for IT admin to remotely control and manage multiple projectors from their workstations. With vertical keystone, and extensive connectivity, the PG706HD provides flexible and quick set-up. What's more, an energy-saving SuperEco™ feature reduces power consumption and extends the lamp life by up to 20,000 hours. The PG706HD is the ideal projector for both high-definition presentations and vibrant multimedia entertainment.




- 1. Control Panel
- 2. Elevation Foot
- 3. Zoom Ring
- 4. IR Remote Sensor
- 5. Projection Lens

- 7. VGA In
- 8. USB 2.0 Type A
- 9. HDMI (x2)
- 10. Audio In/Out
- 11. AC In
- 12. RS232

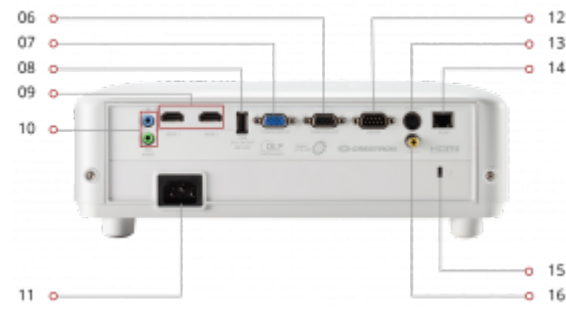


- 13. S-Video In
- 14. LAN
- 15. Kensington® Lock Slot
- 16. RCA Video In



1920 x 1080  
**RESOLUTION**



4,000 ANSI  
**LUMENS**



1.5-1.65  
**THROW RATIO**

### Contact Sales

- call: 888.881.8781
- email: [salesinfo@viewsonic.com](mailto:salesinfo@viewsonic.com)
- visit: [viewsonic.com](http://viewsonic.com)

**Display:**

Type:	DLP Lamp
Resolution Type:	HD (1920x1080)
Resolution:	1920 x 1080
Brightness (Lumens):	4,000 ANSI
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Throw Distance:	3.3 - 36.0 ft / 1.0 - 11.0 m
Throw Ratio:	1.5-1.65
Keystone:	Vertical (+/- 40°)
Lens:	1.1x optical zoom
Light Source (watt):	245
Light Source Life, Normal (hours):	4000
Light Source Life, Dynamic Eco-Mode (hours):	20000
Color Depth:	1.07B Color (R/G/B 10bit)
Aspect Ratio:	16:9

**Video Signal:**

Frequency Horizontal:	15K~102KHz
Frequency Vertical:	23~120Hz

**Compatibility:**

PC Resolution (max):	1920 x 1080
PC Resolution (min):	640 x 480
Mac® Resolution (max):	1920 x 1080
Mac® Resolution (min):	640 x 480

**Connector:**

USB 2.0 Type A(1), Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS-232) (1), HDMI 1.4 In(1), HDMI 1.4 (with HDCP 1.4)(1), VGA In(1), VGA Out(1), Composite RCA Video In(1), S-Video In(1)

**Audio:**

Internal Speakers:	10W (x1)
--------------------	----------

**Power:**

Consumption (typical):	355W
Stand-by:	<0.5W

**Controls:**

Physical Controls:	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

**Operating Conditions:**

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	0-90%

**Additional Hardware:**

Kensington Lock Slot:	1
-----------------------	---

**Weight (imperial):**

Net (lbs):	6.2
Gross (lbs):	8.7

**Weight (metric):**

Net (kg):	2.8
Gross (kg):	3.9

**Dimensions (imperial) (WxHxD):**

Packaging (in.):	16.3 x 6.6 x 11.7
Physical (in.):	12.3 x 8.7 x 4.3

**Dimensions (metric) (WxHxD):**

Packaging (mm):	415.0 x 168.0 x 297.0
Physical (mm):	312.0 x 222.0 x 108.0

**General:**

Regulations: FCC, cTUVus, ROHS

PACKAGE CONTENTS: PG706HD projector, power cable, VGA cable, remote control, Quick Start Guide

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907001792

**Accessories:**

HB10B, IFP2710, PGD-350, PJ-SCW-1001W, PJ-WMK-006, PJ-WMK-007, RLC-120, VC10, VCB10