

Key Features

SuperColor: Amazing Color Accuracy | Large Images In Small Spaces |
3,500 Lumen Brightness | Horizontal and Vertical Keystone | Long Lamp
Life




Product Description

The ViewSonic® PS600X networkable projector features 3,500 lumens, native XGA 1024x768 resolution, and an intuitive, user-friendly design. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment, and a 10W speaker delivers incredibly clear and audible sound. A short throw lens with a 0.61 throw ratio offers large projection images for smaller rooms. With HV keystone, corner adjustment, and easy network management, the PS600X provides flexible setup. Designed with smarter features and extensive connectivity, the networkable short throw PS600X is ideal for use in education and corporate environments.




- 1. Menu Controls
- 2. Elevation Feet
- 3. Zoom Ring
- 4. IR Remote Sensor
- 5. Projection Lens
- 6. USB Mini

- 7. USB 2.0 Type A
- 8. HDMI (x2)
- 9. Audio In
- 10. Audio Out
- 11. AC In
- 12. VGA In (x2)

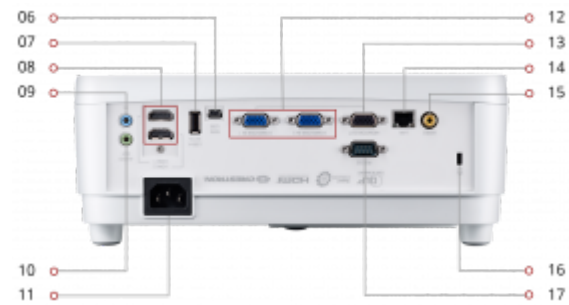


- 13. Monitor Out
- 14. LAN
- 15. Video
- 16. Kensington® Lock Slot
- 17. RS232



1024 x 768
RESOLUTION



3,500 ANSI
LUMENS



0.6
THROW RATIO

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Type:	DLP Lamp
Resolution Type:	XGA (1024x768)
Resolution:	1024 x 768
Brightness (Lumens):	3,500 ANSI
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Throw Distance:	2.4 - 7.3 ft / 0.7 - 2.2 m
Throw Ratio:	0.6
Keystone:	Vertical (± 40°) / Horizontal (± 26°)
Lens:	Fixed Zoom
Light Source (watt):	190
Light Source Life, Normal (hours):	5000
Light Source Life, Dynamic Eco-Mode (hours):	15000
Color Depth:	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio:	22,000:1
Aspect Ratio:	4:3

Video Signal:

Frequency Horizontal:	15K ~ 102KHz
Frequency Vertical:	23 ~ 120Hz

Compatibility:

PC Resolution (max):	1920 x 1080
PC Resolution (min):	640 x 480
Mac® Resolution (max):	1920 x 1080
Mac® Resolution (min):	640 x 480

Connector:

USB 2.0 Type A(1), Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI 1.4 In(2), VGA In(2), VGA Out(1), Composite RCA Video In(1), Mini USB(1)

Audio:

Internal Speakers:	10W (x1)
--------------------	----------

Power:

Voltage:	100-240V+/- 10%, 50/60Hz AC
Consumption (typical):	260W
Stand-by:	<0.5W

Controls:

Physical Controls:	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	0-90%

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Weight (imperial):

Net (lbs):	5.7
Gross (lbs):	7.2

Weight (metric):

Net (kg):	2.6
Gross (kg):	3.3

Dimensions (imperial) (WxHxD):

Packaging (in.):	14.4 x 7.4 x 11.8
Physical (in.):	11.5 x 4.5 x 9.3

Dimensions (metric) (WxHxD):

Packaging (mm):	365.0 188.0 x 300.0
Physical (mm):	292.0 x 115.0 x 236.0

General:

AV Control: AMX Certified, ATEN Certified, Crestron Certified, PJ Link Certified

Regulations: FCC, cTUVus, ROHS

PACKAGE CONTENTS: PS600X projector, power cable, VGA cable, remote control, Quick Start Guide

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907958218

Accessories:

HB10B, PGD-350, PJ-IWBADP-006, PJ-IWBADP-008, PJ-SCW-1001W, PJ-VTOUCH-10S, PJ-WMK-007, PJ-WMK-305, PRJ-EE-07-03, PRJ-EEEW-07-01, PRJ-EEEW-07-02, PRJ-EW-07-01, PRJ-EW-07-02, RLC-108, VC10, VCB10