


Key Features

SuperClear IPS Panel Technology | Two Monitors in a Single Package |
 Seamless Viewing Experience | Environmentally Friendly Packaging |
 Loaded with Connectivity



Product Description


Designed for the modern day office, the ViewSonic® VG2448_H2 dual monitor pack delivers an efficient end-to-end enterprise experience. From easy installation, to recycling, to long-term reliability, this dual monitor solution reduces the total cost of ownership beyond the initial purchase price. Sold as a dual pack of monitors without monitor stands, the VG2448_H2 ships in biodegradable packaging to minimize recycling costs and waste. Standard VESA-compatible mounting offers easy dual-screen installation. SuperClear® IPS panel technology delivers wide-angle viewing and incredibly vivid colors. A variety of input options include VGA, HDMI, DisplayPort and USB 3.0 to deliver both legacy and future-proof connectivity.

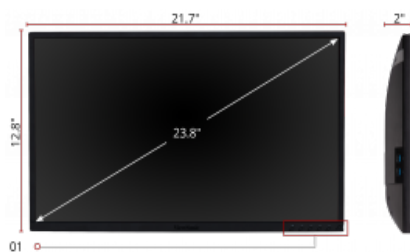

- | | |
|--|------------------------|
| 1. Menu Control Panel | 5. Internal Speakers |
| 2. VESA Compatible Wall Mount (100 x 100 mm) | 6. VGA |
| 3. USB 3.0 Type A (x2) | 7. USB 3.0 Type B |
| 4. Kensington® Lock Slot | 8. USB 3.0 Type A (x2) |
| | 9. HDMI 1.4 |



- | |
|--------------------|
| 10. DisplayPort In |
| 11. AC In |



24"
DISPLAY



IPS
PANEL



1920 x 1080
RESOLUTION

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Display Size (in.):	24
Viewable Area (in.):	23.8
Panel Type:	IPS
Resolution:	1920 x 1080
Resolution Type:	HD (1920x1080)
Static Contrast Ratio:	1,000:1
Dynamic Contrast Ratio:	50,000,000:1
Light Source:	WLED
Brightness:	250 cd/m2
Colors:	16.7M
Color Space Support:	6 bits
Aspect Ratio:	16:9
Response Time (Typical GTG):	14ms
Response Time (GTG w/OD):	5ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30,000
Panel Surface:	Anti-glare, Hard coating 3H

Compatibility:

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080

Connector:

USB 3.0 Type A(4), USB 3.0 Type B(1), VGA(1), HDMI 1.4 In(1), Display Port(1)

Audio:

Internal Speakers:	2W (x2)
--------------------	---------

Power:

Eco Mode (Conserve):	14.6W
Eco Mode (optimized):	17.4W
Consumption (typical):	25W
Consumption (max):	57W
Voltage:	AC 100-240V (universal), 50-60Hz
Stand-by:	0.5W
Power Supply:	Internal

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Controls:

Physical Controls:	1,2,3,4,5, Power
On Screen Display:	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Advanced Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	20-90%

Mount:

VESA Compatible:	100 x 100 mm
------------------	--------------

Video Signal:

Frequency Horizontal:	24 ~ 82KHz
Frequency Vertical:	50 ~ 75Hz

Video Input:

Digital Sync:	TMDs for HDMI (v1.4), PCI-E for DisplayPort (v1.2)
---------------	--

Weight (imperial):

Net (lbs):	15.2
Gross (lbs):	21.8

Weight (metric):

Net (kg):	6.9
Gross (kg):	9.9

Dimensions (imperial) (WxHxD):

Packaging (in.):	26.0 x 16.4 x 9.8
Physical Without Stand (in.):	21.7 x 12.8 x 2.0

Dimensions (metric) (WxHxD):

Packaging (mm):	660.0 x 417.0 x 250.0
Physical Without Stand (mm):	549.4 x 325.6 x 50.0

General:

Regulations: cTUVus, FCC-B, ICES003, Energy Star, EPEAT, MX-CoC, Mexico Energy

PACKAGE CONTENTS: LCD Display x2, Power Cable x2, DP to DP Cable x1, HDMI Cable x1, USB3.0 Upstream Cable x2, Quick Start Guide x1

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

Warranty: Three-year limited warranty on parts, labor and backlight

UPC: 766907001853

Accessories:

CB-00008948, CB-00009950, CB-00010684, CB-00010958, LCD-CMK-001, LCD-WMK-001